



SIGNAL
High Visibility Materials

COATS[®]
SIGNAL[™]





ABOUT COATS®

At Coats we have over 250 years of pioneering experience and are global leaders in industrial threads, engineered yarns and trims, employing more than 17,000 employees in over 50 countries. We are proud of our tradition of landmark innovations in threads, colour technology and manufacturing processes, many of which have become global industry standards. Our comprehensive range of products are designed to deliver the desired strength and performance characteristics

that make Coats' products the first choice for manufacturers of high quality textiles. Our product offer is supported by a suite of value added services to help customers improve efficiency, solve problems and train staff online or onsite. Coats' comprehensive product offer, worldwide network and established leadership in innovation and service make us your natural first choice for a truly global partner.

COATS® SIGNAL™

Coats Signal is a global range of high quality, reflective tapes for workwear, protective clothing, apparel and accessories.

When illuminated by a light source, Signal helps to enhance a product's visibility at night or during bad weather. In combination with fluorescent elements, Signal improves daytime and low light visibility.

Signal articles exceed the requirements of key high-visibility regulations to ensure maximum performance. Our premium quality retro reflective tapes designed for tough industrial laundry conditions and can withstand up to 70 industrial laundry cycles including tunnel dry at temperature of 160°C. All Signal articles comply with STANDARD 100 by OEKO-TEX®.

Discover how Signal can enhance your products.

SEW-ON TAPES

Domestic Wash

Coats Signal retro reflective tapes for domestic wash are for all types of high visibility applications. They meet and exceed the requirements of key high visibility norms including EN ISO 20471 and ANSI/ISEA 107. When illuminated by a light source, they help to enhance the visibility at night-time or difficult weather conditions.

APPLICATIONS

- Apparel
- Luggage and travel goods
- Fashion accessories
- Workwear
- Uniforms

TECHNICAL DATA

Article		C402000	C402200
Daytime colour			
		Silver	Silver
Backing		Poly/Cotton	Poly/Cotton
Retro-reflective performance (cd/lux/m²)		400	500
60°C Domestic wash ISO 6330		60	100
Dry clean ISO 3175		50	50
EN ISO 20471		•	•
ANSI/ISEA 107		•	•
STANDARD 100 BY OEKO-TEX®		•	•
Standard width (other widths available upon request)	50mm	•	•
Make-up (standard width)	Meter / Roll	200	200





SEW-ON TAPES Industrial Wash

Coats Signal retro reflective tapes for industrial wash are for all types of high visibility applications. They are designed for tough industrial laundry conditions and withstand up to 70 industrial laundry cycles including tunnel drying at temperatures of 160°C. Rigorous testing in industrial wash cycles ensures these products meet the quality that you expect from Coats.

APPLICATIONS

- Apparel
- Workwear
- Uniforms

TECHNICAL DATA

Article		C402500	C402700	C442500	C402700-00003
Daytime colour					
		Silver	Silver	Silver	Dark Grey
Feature				First sustainable reflective tape on the market	Same high reflectivity as standard silver tapes
Backing		Poly/Cotton	Poly/Cotton	100% Recycled Polyester	Poly/Cotton
Retro-reflective performance (cd/lux/m²)		500	500	500	500
60°C Domestic wash ISO 6330		100	100	50	100
75°C Industrial wash ISO 15797, method 8 tumble dry and tunnel dry		30	70	50	50
Dry clean ISO 3175		50	50	50	50
EN ISO 20471		•	•	•	•
ANSI/ISEA 107		•	•	•	•
STANDARD 100 BY OEKO-TEX®		•	•	•	•
Standard width (other widths available upon request)	50mm	•	•	•	•
Make-up (standard width)	Meter / Roll	200	200	200	200

HEAT TRANSFERS

For domestic and industrial wash

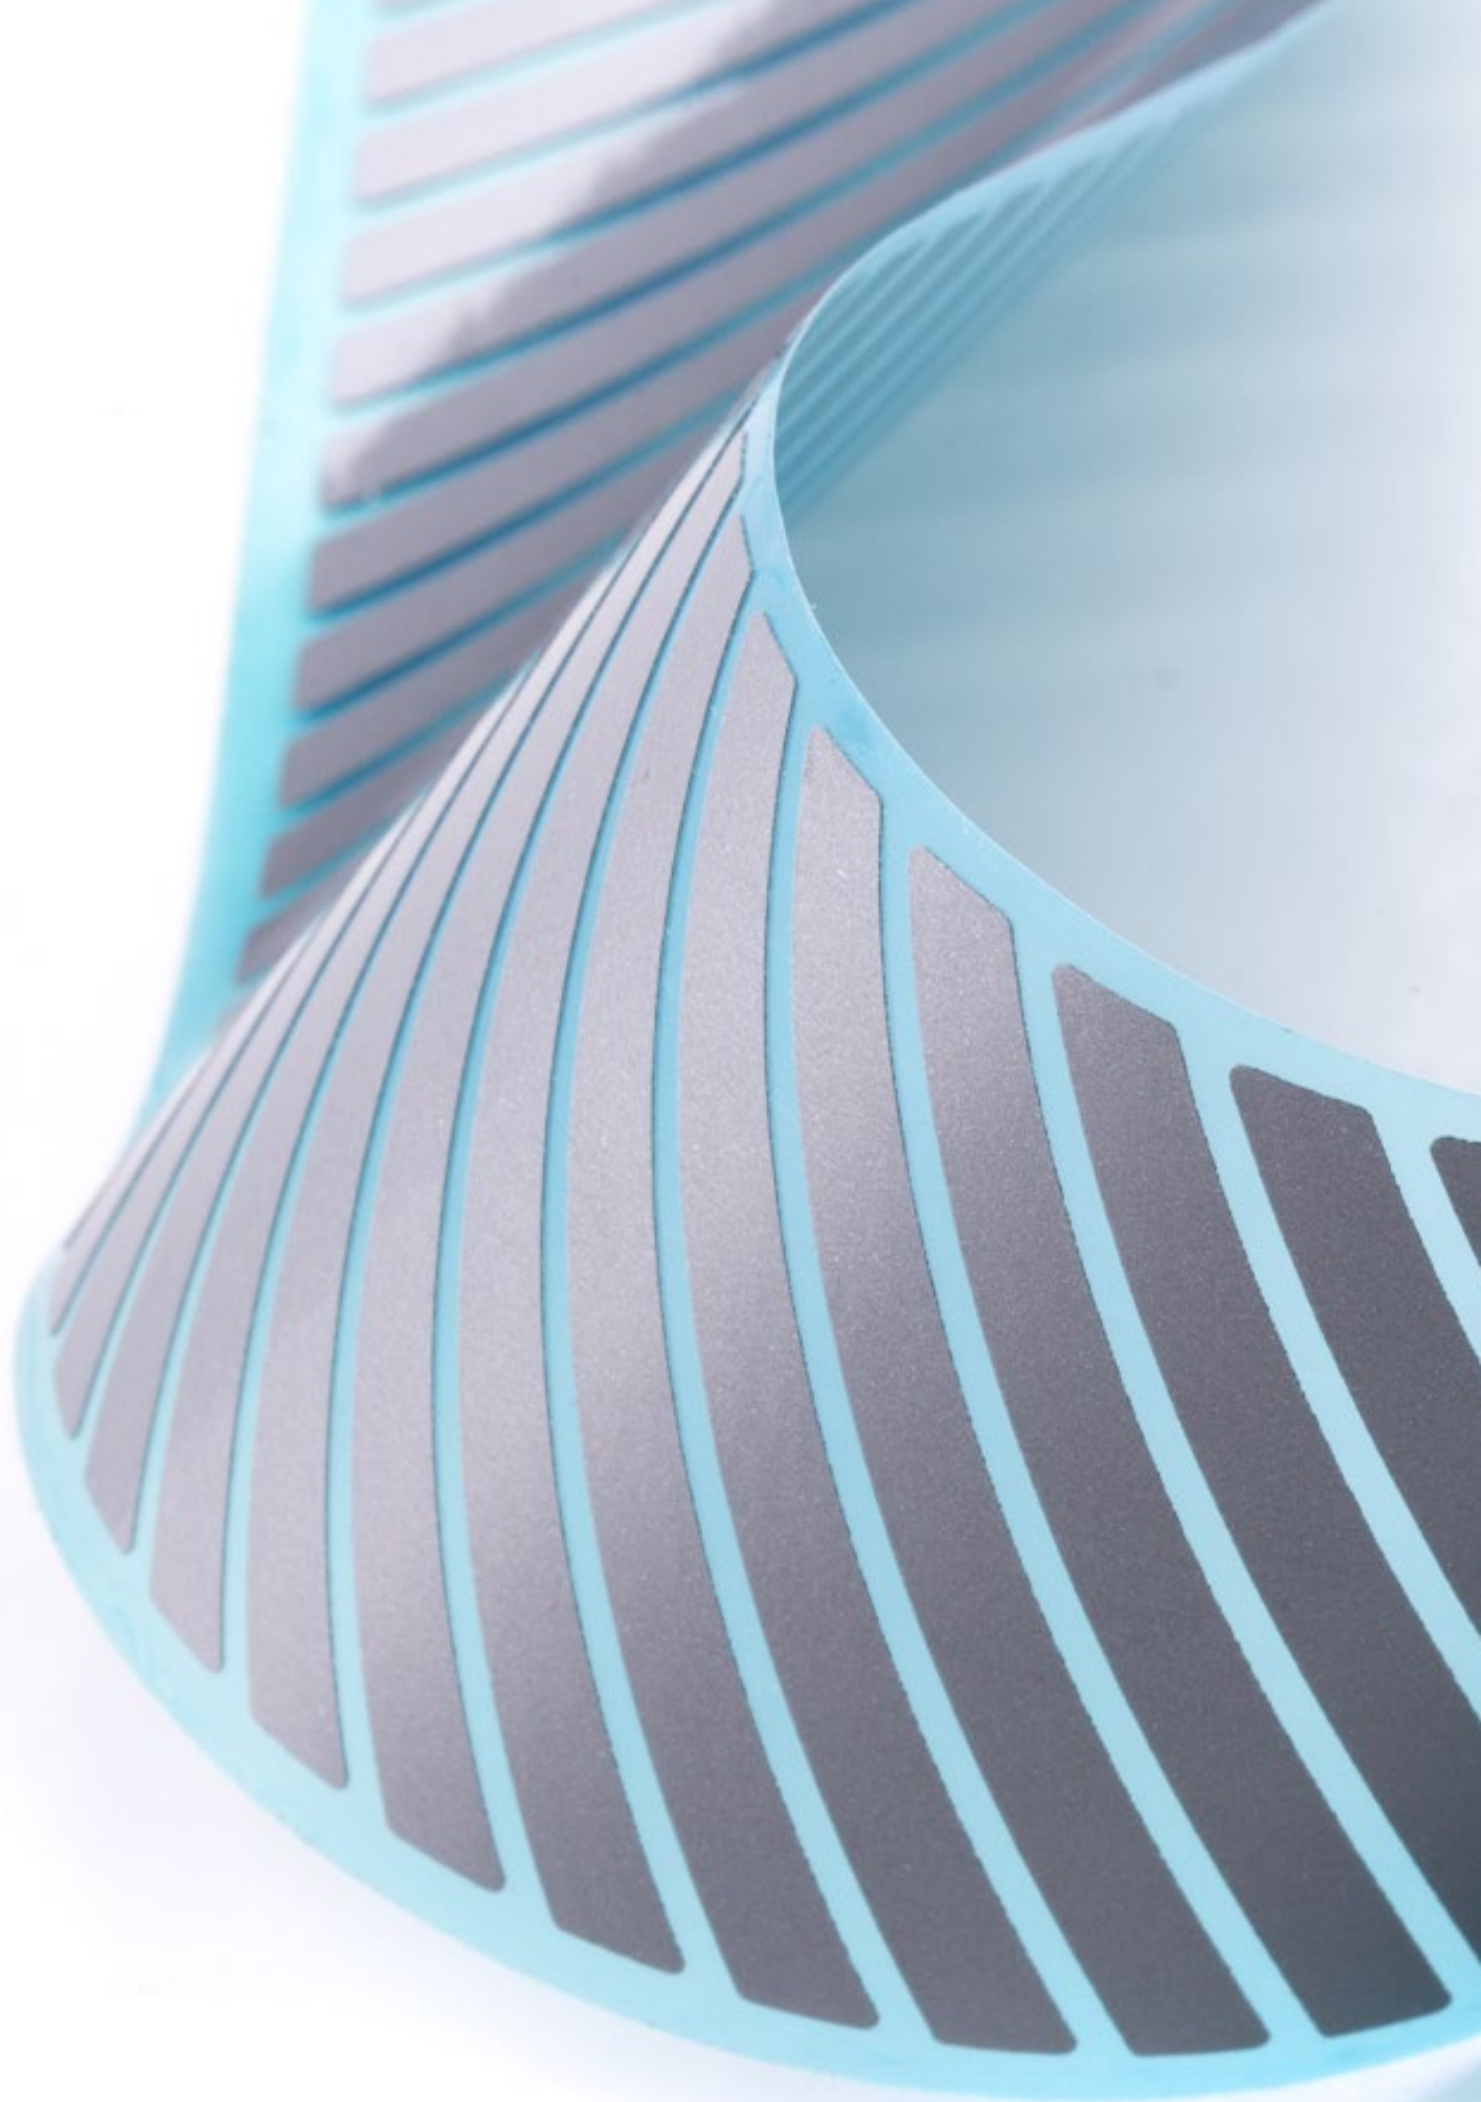
Coats Signal retro reflective heat transfers are for all types of high visibility applications and can be easily applied by using a heat press. They can be laser cut and are an ideal choice for customized designs and logos. Coats Signal retro reflective heat transfers offer a number of benefits such as industrial washing performance and increased wearing comfort.

APPLICATIONS

- Workwear
- Uniforms
- Sportswear
- Childrenswear
- Luggage and travel goods
- Fashion accessories

TECHNICAL DATA

Article		C502200	C502600	C50220S	C50260S	C532100
Daytime colour						
		Silver	Silver	Silver	Silver	Silver
Feature				Segmented	Segmented	Elastic
Backing		Polymer film	Polymer film	Polymer film	Polymer film	Polymer film
Retro-reflective performance (cd/lux/m²)		500	500	400	400	500
60°C Domestic wash ISO 6330		60	100	60	100	60
75°C Industrial wash ISO 15797, method 8 tumble dry and tunnel dry			50		50	
Dry clean ISO 3175		50	50	50	50	50
EN ISO 20471		•	•	•	•	•
ANSI/ISEA 107		•	•	•	•	•
STANDARD 100 BY OEKO-TEX®		•	•	•	•	•
Standard width (other widths available upon request)		50mm	•	•	•	•
Make-up (standard width)	Meter / Roll	200	200	200	200	200






FLAME RESISTANT AND FLAME RETARDANT Sew-on tapes for domestic and industrial wash


Coats Signal premium flame resistant and flame retardant retro reflective tapes are designed for maximum heat and flame protection, for great visibility and resistance to extreme conditions. These products are certified according to European, US and Australian protective clothing standards. Coats Signal retro reflective tapes are made of flame retardant cotton or meta-aramid and have been designed to withstand industrial washing.

APPLICATIONS

- Heat and flame protective clothing for firefighters
- Heat and flame protective clothing for industrial applications

TECHNICAL DATA

Article		C422100	C42210P	C422310	C422810
Daytime colour					
		Silver	Silver	Yellow/Silver	Yellow
					
				Red/Silver	Red
Feature			Perforated		
Backing		FR cotton	FR cotton	FR cotton	FR cotton
Retro-reflective performance (cd/lux/m²)		500	500	500	75
60°C Domestic wash ISO 6330		100	100	60	30
75°C Industrial wash ISO 15797, method 8 tumble dry and tunnel dry		50	50		
Dry clean ISO 3175		50	50	50	30
EN ISO 20471 / EN 469		•	•	•	•
EN ISO 15384				•	•
ANSI/ISEA 107		•	•	•	
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112		•	•		
CAN/CGSB 155.22 / CAN/CGSB 155.20					
STANDARD 100 BY OEKO-TEX®		•	•	•	•
Standard width (other widths available upon request)	50mm	•	•	•	•
	75mm			•	•
Make-up (standard width)	Meter / Roll	100	100	50	50

C412300	C41230P	C412400	C412500	C412500-00003	C41250P
					
Yellow/Silver	Yellow/Silver				
					
Red/Silver	Red/Silver	Yellow/Silver	Silver	Dark Grey	Silver
					
Orange/Silver	Orange/Silver				
	Perforated				Perforated
M-aramid	M-aramid	M-aramid	M-aramid	M-aramid	M-aramid
500	500	500	500	500	500
60	60	60	100	100	100
			50	50	50
50	50	50	50	50	50
•	•	•	•	•	•
•	•	•	•	•	•
•	•		•	•	•
• *	• *	•	•	• **	•
• *	• ***	•	•		
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•			
100	100	100	100	100	100

*Only for Yellow/Silver and Orange/Silver

***Only for Orange/Silver

**Only NFPA 2112

TECHNICAL DATA

Article		C412800	C41280P
Daytime colour			
		Yellow	Yellow
		Orange	Orange
Feature			Perforated
Backing		M-aramid	M-aramid
Retro-reflective performance (cd/lux/m²)		125/75	125/75
60°C Domestic wash ISO 6330		60	60
Dry Clean ISO 3175		50	50
EN ISO 20471 / EN 469		•	•
EN ISO 15384		•	•
ANSI/ISEA 107			
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112		•	
CAN/CGSB 155.22 / CAN/CGSB 155.20		•	
STANDARD 100 BY OEKO-TEX®			
Standard width (other widths available upon request)	50mm	•	•
Make-up (standard width)	Meter / Roll	100	100



FLAME RESISTANT AND FLAME RETARDANT

Heat transfers for domestic and industrial wash

Coats Signal premium flame retardant retro reflective heat transfers are designed for maximum heat and flame protection, for great visibility and resistance to extreme conditions. These products are certified according to global protective clothing standards. Retro reflective silver grey heat transfers are designed to withstand industrial washing.

APPLICATIONS

- Heat and flame protective clothing for firefighters
- Heat and flame protective clothing for industrial applications



TECHNICAL DATA

Article		C522100	C52210S	C522100-00003	C52210S-00003
Daytime colour		 Silver	 Silver	 Dark Grey	 Dark Grey
Feature			Segmented		Segmented
Backing		FR polymer film	FR polymer film	FR polymer film	FR polymer film
Retro-reflective performance (cd/lux/m²)		500	400	500	400
60°C Domestic wash ISO 6330		100	100	100	100
75°C Industrial wash ISO 15797, method 8 tumble dry and tunnel dry		50	50	50	50
Dry clean ISO 3175		50	50	50	50
EN ISO 20471 / EN 469		•	•	•	•
EN ISO 15384		•	•	•	•
ANSI/ISEA 107		•	•	•	•
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112			•		
CAN/CGSB 155.22 / CAN/CGSB 155.20					
STANDARD 100 BY OEKO-TEX®		•	•	•	•
Standard width (other widths available upon request)	50mm	•	•	•	•
	75mm				
Make-up (standard width)	Meter / Roll	200	200	200	200

TECHNICAL DATA

Article		C52230S	C52250S
Daytime colour			
		Yellow/Silver	
			Yellow/Silver
		Orange/Silver	
Feature		Segmented	Segmented
Backing		FR polymer film	FR polymer film
Retro-reflective performance (cd/lux/m²)		400	400
60°C Domestic wash ISO 6330		60	50
75°C Industrial wash ISO 15797, method 8 tumble dry and tunnel dry			
Dry clean ISO 3175		50	50
EN ISO 20471 / EN 469		•	•
EN ISO 15384		•	•
ANSI/ISEA 107		•	
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112		•	
CAN/CGSB 155.22 / CAN/CGSB 155.20		• *	
STANDARD 100 BY OEKO-TEX®		•	•
Standard width (other widths available upon request)	50mm	•	•
	75mm	•	•
Make-up (standard width)	Meter / Roll	100	100

*Only for Orange/Silver

TECHNICAL DATA

Article		C52230F	C52250F
Daytime colour			
		Yellow/Silver	Yellow/Silver
Feature		Segmented	Segmented
Backing		FR polymer film	FR polymer film
Retro-reflective performance (cd/lux/m²)		400	400
60°C Domestic wash ISO 6330		60	60
75°C Industrial wash ISO 15797, method 8 tumble dry and tunnel dry			
Dry clean ISO 3175		50	50
EN ISO 20471 / EN 469		•	•
EN ISO 15384		•	•
ANSI/ISEA 107		•	
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112			
CAN/CGSB 155.22 / CAN/CGSB 155.20			
STANDARD 100 BY OEKO-TEX®		•	•
Standard width (other widths available upon request)	50mm	•	
	75mm	•	
	54mm		•
	79mm		•
Make-up (standard width)	Meter / Roll	100	100

TECHNICAL DATA

Article		C522800	C52280S
Daytime colour			
		Yellow	Yellow
		Orange	Orange
Feature			Segmented
Backing		FR polymer film	FR polymer film
Retro-reflective performance (cd/lux/m²)		125	100
60°C Domestic wash ISO 6330		60	60
Dry clean ISO 3175		50	50
EN ISO 20471 / EN 469		•	•
EN ISO 15384		•	•
ANSI/ISEA 107			
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112			
CAN/CGSB 155.22 / CAN/CGSB 155.20			
STANDARD 100 BY OEKO-TEX®		•	•
Standard width (other widths available upon request)			
	50mm	•	•
Make-up (standard width)	Meter / Roll	200	200





PIPING AND ELASTIC Sew-On products

Coats Signal piping and elastic products have the same high visibility retro reflective properties that define the Coats Signal range. They are suitable for high visibility and decorative applications across a wide variety of garments and fabric types. Both piping and elastic products are ideal to add distinctive design elements to sportswear, fashionwear and childrenswear while enhancing visibility in low light or adverse weather conditions.

APPLICATIONS

- Sportswear
- Childrenswear
- Outerwear
- Workwear
- Uniforms
- Luggage and travel goods
- Backpacks
- Fashion accessories

TECHNICAL DATA

Article		C302200	C432200	C432100	C532100
Daytime colour		 Silver	 Silver	 Silver	 Silver
Feature		Piping maximum one joint in 100m	Single sided elastic tape	Double sided elastic tape	Elastic heat transfer
Construction / backing		Poly/ Spandex with inner cord and lining	Poly/Spandex	Poly/Spandex	Polymer
Retro-reflective performance (cd/lux/m²)		400	500	500	500
60°C Domestic wash ISO 6330		•	•	•	•
Dry clean ISO 3175		•	•	•	•
EN ISO 20471			•	•	•
ANSI/ISEA 107			•	•	•
STANDARD 100 BY OEKO-TEX®		•	•	•	•
Standard width (other widths available upon request)	5mm		•	•	
	50mm		•		•
Make-up (standard width)	Meter / Roll	100	200/50	200	200




SIGNAL LUCENCE Phosphorescent Tapes

Coats Signal Lucence is a range of sew-on tapes, heat transfers and self-adhesive material which utilises a patent pending, revolutionary safety innovation based on phosphorescent technology (VizLite DT).

APPLICATIONS

- Apparel
- Footwear
- Activewear
- Firefighters
- PPE
- Workwear

WHAT ARE THE BENEFITS?



AFTERGLOW
FOR OVER
8 HOURS



RETRO
REFLECTION



FULLY
LAUNDERABLE



OEKO-TEX®
CONFIDENCE IN TEXTILES
STANDARD 100
MEETS HIGH VISIBILITY, FR
AND ARC CERTIFICATION

TECHINAL DATA

SIGNAL LUCENCE - PHOSPHORESCENT TAPES

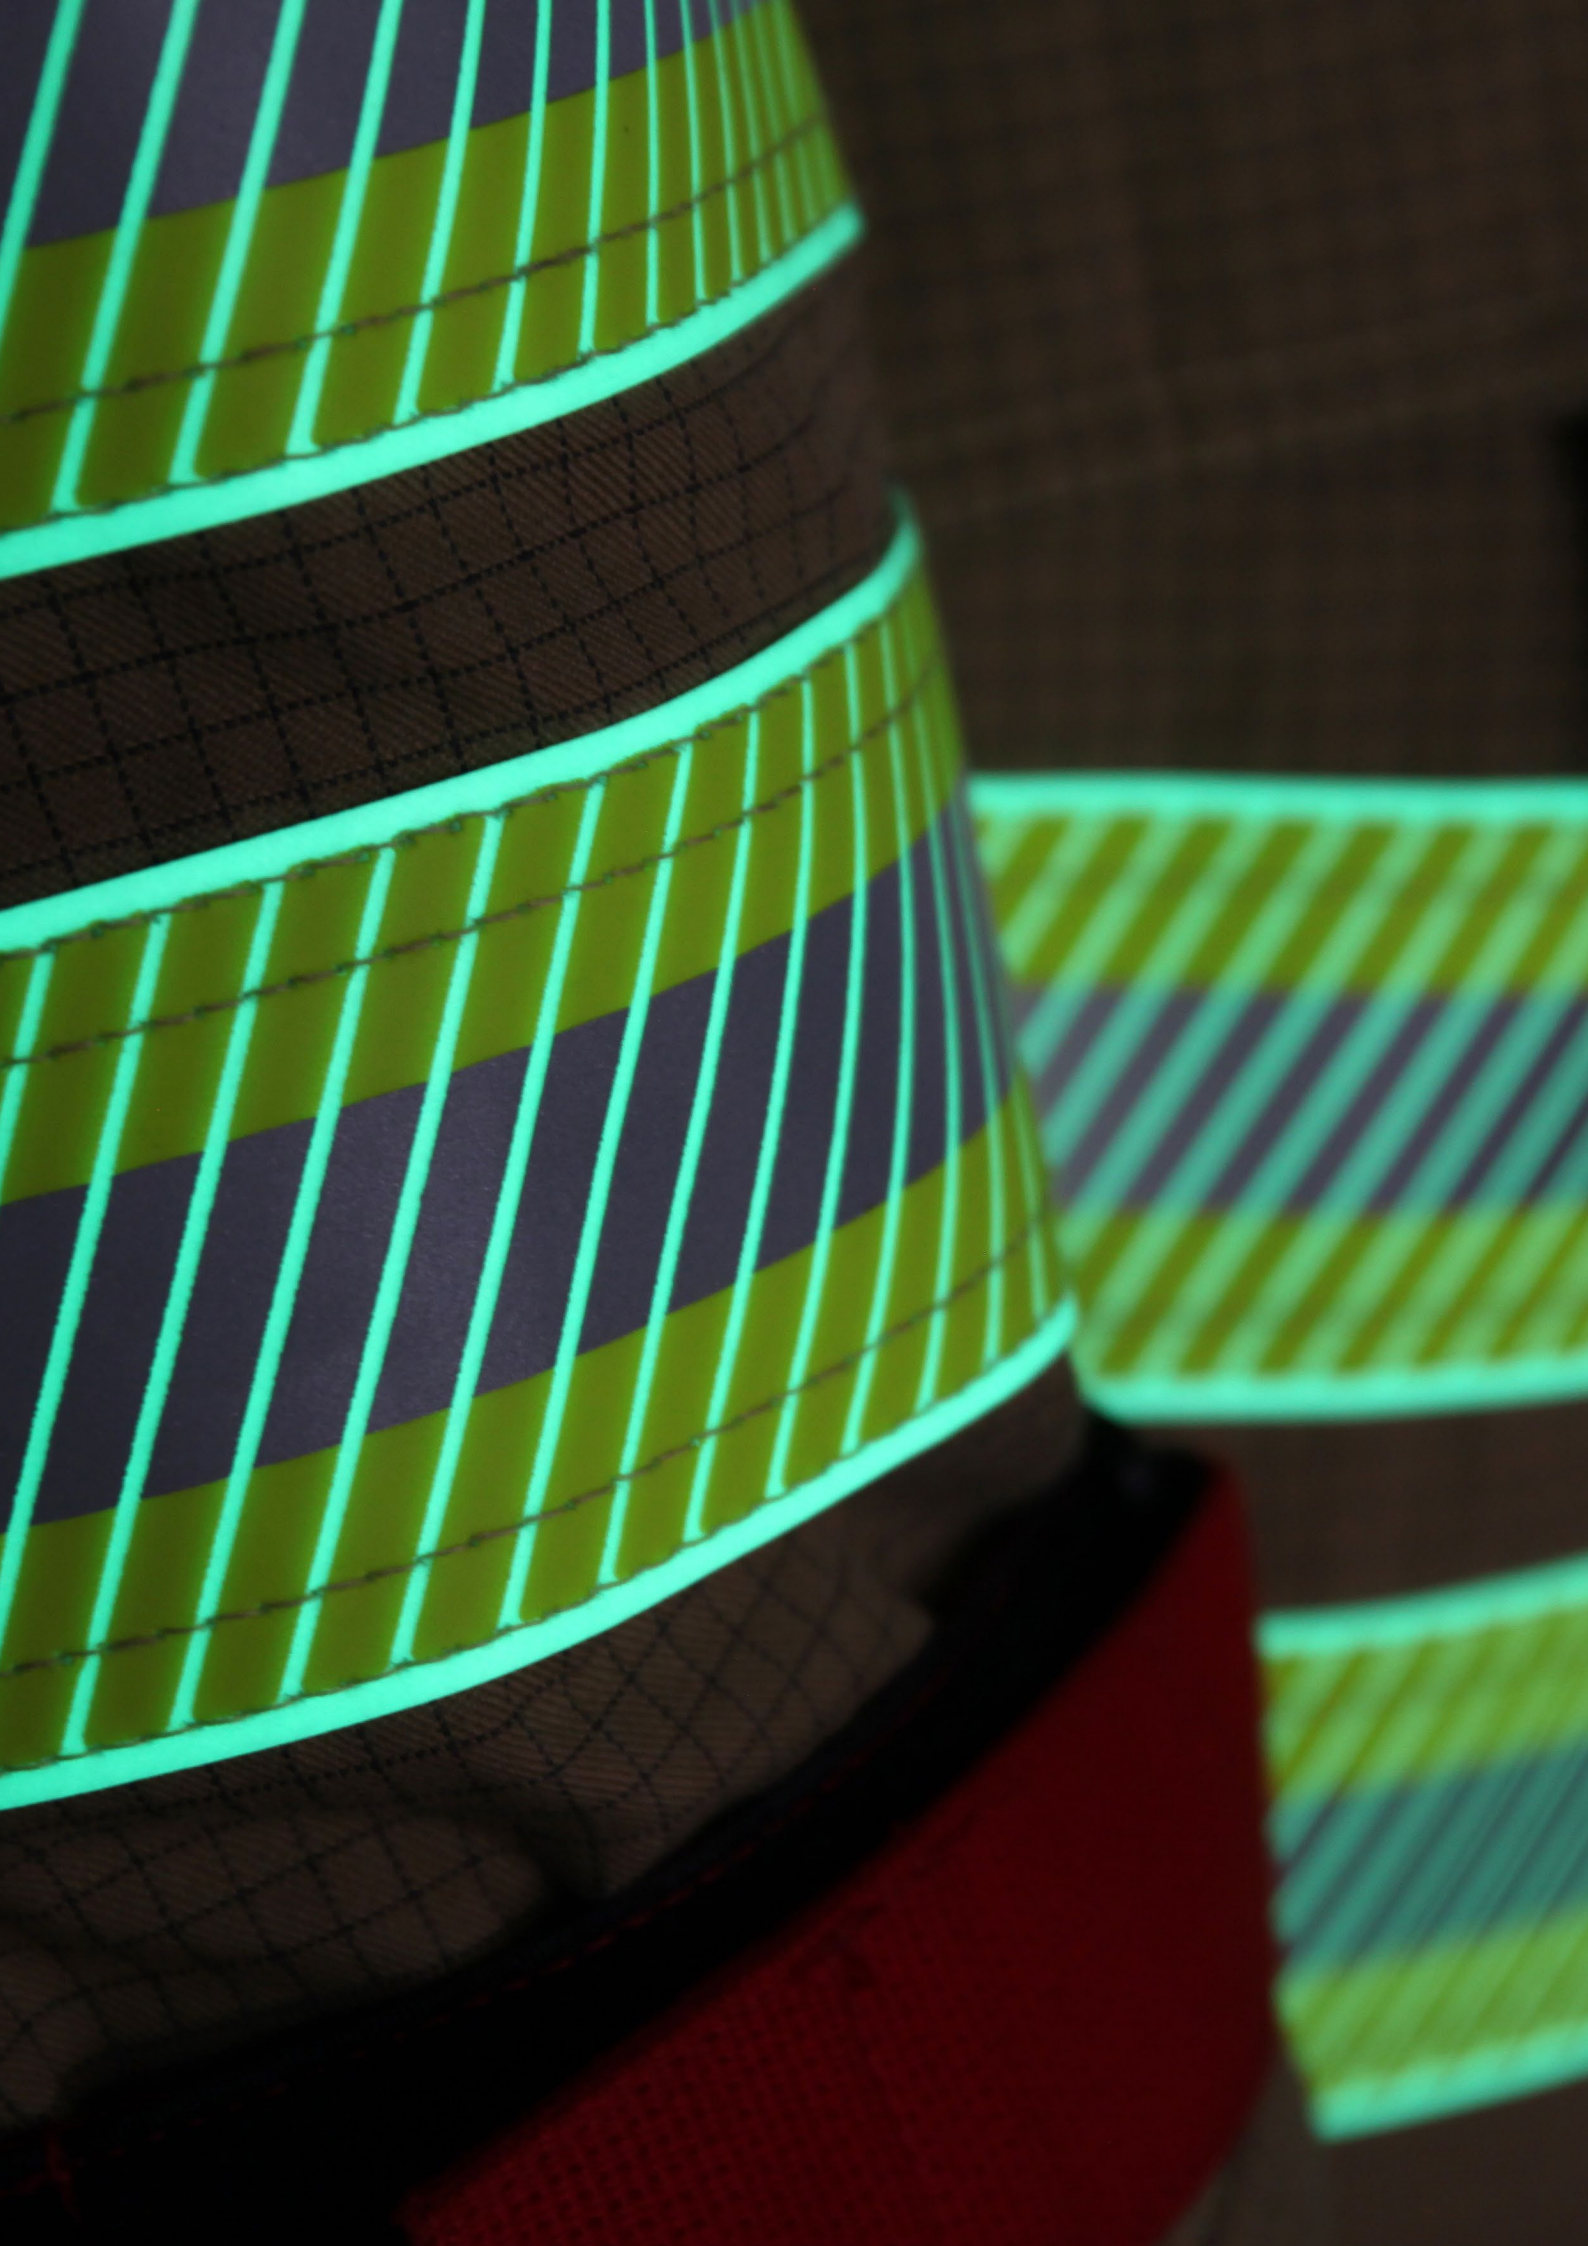
Article		C602000	C602500	C602100
		Sew-on	Sew-on	Sew-on
Glowing colour				
		Phosphorescent Yellow	Phosphorescent Yellow	Reflective tape with phosphorescent material
Feature				
Backing		Poly/Cotton		
40°C Domestic Wash (ISO 6330, 4N)		50	50	50
60°C Domestic Wash (ISO 6330, 6N)			50	
75° C Industrial Wash (ISO 15797)			30	
EN ISO 20471 or ANSI/ISEA 107				•
EN 469, EN ISO 14116, EN ISO 11611, EN ISO 11612				
EN ISO 15384				
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112				
CAN/CGSB 155.20				
STANDARD 100 BY OEKO-TEX®		•	•	•
Standard width*	10mm	•	•	
	70mm			•
Make-up (standard width)	50m		•	•
	100m	•		

C612500	C702200	C722200	C72220S
Sew-on	Heat transfer	Heat transfer	Heat transfer
			
Phosphorescent Yellow	Phosphorescent Yellow	Phosphorescent Yellow	Phosphorescent Yellow
			Segmented
M-aramid	Polymer film	FR polymer film	FR polymer film
50	50		
50		60	60
50			
•		•	•
•		•	
•	•	•	•
•	•	•	•
•			
•	•	•	•

TECHNICAL DATA

Article	C802000
Colour	Phosphorescent Yellow
Backing / Liner	Multi-layered film with a permanent pressure sensitive adhesive with a PET backing sheet
Type	Self-adhesive
Thickness	Without Liner: 370 microns With Liner: 470 microns Liner: 80 microns Adhesive layer: 20 microns
Adhesive colour	Transparent
Adhesive type	Permanent pressure sensitive Acrylic 63% ethylhexyl acrylate 23% methyl acrylate 14% methyl methacrylate
Liner	Clear film 80 microns
Application temperature	10°C - 38°C





SIGNAL LUCENCE PRO



High Performance Sew-On Tapes

Coats Signal Lucence PRO is a range of high performance sew-on tapes, which offers the option to combine three technologies; retro-reflectivity, fluorescence and phosphorescence in a single material to meet the requirements of the hi-vis workwear and firefighter markets.

APPLICATIONS

- Firefighters
- Hi- vis workwear

TECHNICAL DATA

		C612100	C612200	C612400
Glowing colour				
		Silver Phosphorescent Yellow	Yellow/Silver Phosphorescent Yellow	Yellow/Silver Phosphorescent Yellow
Feature		Retro-reflective Phosphorescent	Retro-reflective Fluorescent Phosphorescent	Retro-reflective Fluorescent Phosphorescent
Backing		M-aramid	M-aramid	M-aramid
Type		Sew-on	Sew-on	Sew-on
60°C Domestic Wash (ISO 6330, 6N)		50	60	50
EN ISO 20471		•	•	•
EN 469, EN ISO 14116, EN ISO 11611, EN ISO 11612		•	•	•
EN ISO 15384		•	•	•
NFPA 1970 (1971) / 1950 (1951, 1977) / 2112			•	
STANDARD 100 by OEKO-TEX®		•	•	•
Width	55mm	•	•	•
	80mm		•	•
Make-up (standard width)	50m	•	•	•

COATS CONNECT

Hook and Loop Solutions



Explore our **Coats Connect** range:
Advanced hook and loop solutions that
elevate your material performance.
Scan to discover more!

Disclaimer

Since conditions and applications vary considerably in the use of a product, the customer and/or user should assure herself or himself that the product meets end customer requirements and is suitable for the intended end use. Coats® accepts no liability for unsuitable or improper use or application of products. Information provided above is based on current averages and should be taken only as indicative. Coats® accepts no liability for the preciseness and correctness of the information provided. Coats® Signal™ cannot guarantee an absolute visibility especially in severe weather conditions.

Coats Signal reflective tapes should be stored in a cool (5°C to 25°C), dry place with less than 70% relative humidity, and used within one year of the date of receipt. After use, rolls should be returned to their original packaging or suspended from the center using a rod.

Brochures are updated from time to time, please be sure you are referring to the most recent publication. Coats® supports customers with advice on individual applications on request; if you have any questions or concerns, please contact us.

Coats® is a registered trademark of J. & P. Coats, Limited. Signal™ is a trademark of J. & P. Coats, Limited.
© Copyright reserved 2026.

READY TO COLLABORATE WITH COATS?

For more information visit
www.coats.com

